LOAN DOCUMENT

PHOTOGRAPH THIS SHEET

DTIC ACCESSION NUMBER

LEVEL

INVENTORY

0

Laser Radar Architecture
multi-Aperature v. Single aperture

DOCUMENT IDENTIFICATION

2000

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR

NTIS GRA&I ☑
DTIC TRAC ☐
UNANNOUNCED ☐
JUSTIFICATION

BY

DISTRIBUTION/

AVAILABILITY CODES

DISTRIBUTION	AVAILABILITY AND/OR SPECIAL	
A-1		

DISTRIBUTION STAMP

DATE ACCESSIONED

DATE RETURNED

20001020 123

DATE RECEIVED IN DTIC

REGISTERED OR CERTIFIED NUMBER

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-FDAC

DTIC FORM 70A JUN 90

DOCUMENT PROCESSING SHEET

PREVIOUS EDITIONS MAY BE USED UNTIL STOCK IS EXHAUSTED.

LOAN DOCUMENT

DTIC QUALITY INSPECTED 4

HANDLE WITH CARE

Approved for Public Release;
Distribution is Unlimited.

Laser Radar Architecture: Multi-Aperture vs. Single Aperture

Ronald L. Phillips, Director
Florida Space Institute
University of Central Florida
Kennedy Space Center
E-mail: phillips@creol.ucf.edu

Larry C. Andrews
Department of Mathematics and
School of Optics/CREOL
University of Central Florida
E-mail: landrews@pegasus.cc.ucf.edu

Introduction

- Free space optical communication and laser radar links that operate within even a thin atmosphere can exhibit severe temporal short-term fading and cause tracking difficulties that are attributed to turbulence-induced scintillation
- Various system architectures can be developed to mitigate scintillation and other atmospheric effects
  - < Increased transmitter power (may not be practical)
  - < Increased aperture size (may not be practical)
  - < Multiple small apertures at the receiver (both direct and coherent detection)

Array Receivers: Direct Detection

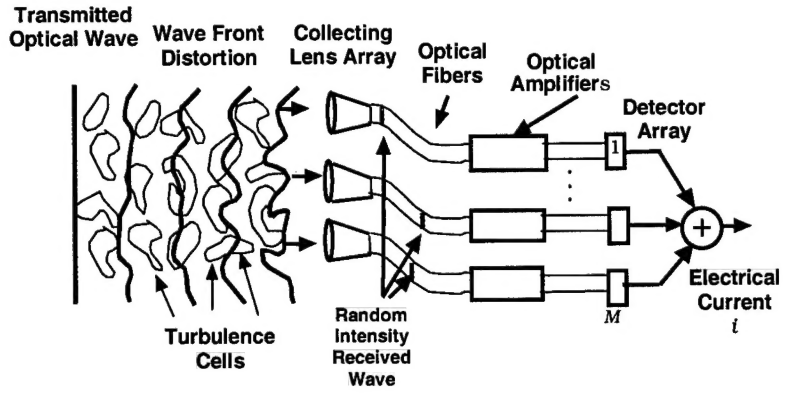

Figure 1 Array of M direct detection receivers.

Array Receivers: Direct Detection SNR

- Let the summed output of M statistically independent detectors be described by

$$i = \sum_{j=1}^{M} (i_{S,j} + i_{N,j}), \tag{1}$$

  - each i_S is a random signal and each i_N is a zero-mean noise current
  - we assume the mean and variance of each signal and noise current is identical

- It follows therefore that the *mean rms amplitude SNR* is simply

$$\langle \mathrm{SNR}_M \rangle = \frac{M \langle i_{S,1} \rangle}{\sqrt{M}\, \sigma_{N,1}} = \sqrt{M} \langle \mathrm{SNR}_1 \rangle, \tag{2}$$

where $\langle \mathrm{SNR}_1 \rangle$ is the mean SNR of a single detector.

Direct Detection: Aperture Averaging

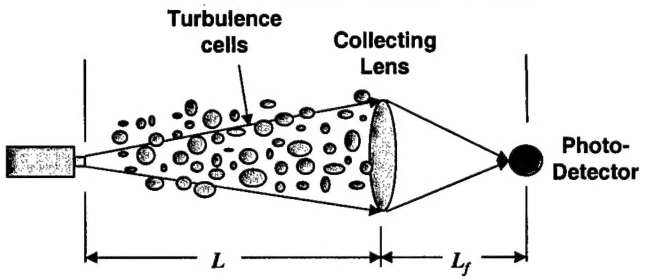

- The reduction in scintillation with increasing telescope collecting diameter *D*, called *aperture averaging*, can be deduced from the normalized power fluctuations *P* over the area of the collecting aperture lens, i.e.,

$$\sigma_I^2(D) = \frac{\langle P^2 \rangle - \langle P \rangle^2}{\langle P \rangle^2}$$

Array Receivers: Direct Detection

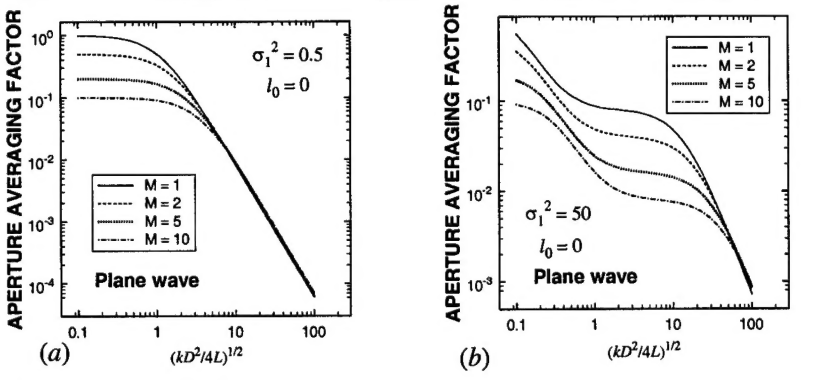

Figure 2 Predicted aperture averaging factor in (*a*) *weak irradiance fluctuations* and (*b*) *strong fluctuations*. ($\sigma_1^2 = 1.23 C_n^2 k^{7/6} L^{11/6}$)

NOTE: The glass area of the M collecting lenses is the same as that of the single large lens and inner scale $l_0 = 0$.

Array Receivers: Coherent Detection

Three common multiple-receiver architectures are the following:

- **Selection combining**
  - signal from receiver with largest SNR is switched to output (all others discarded)
  - simplest architecture but does little to improve SNR
- **Maximal-ratio (MR) combining**
  - RF signals are co-phased, have their amplitudes adjusted, and adjusted signals summed to generate composite signal
  - considered optimal design but requires major effort in instrumentation to achieve proper weighting factors
- **Equal-gain (EG) combining**
  - equal gains are applied to all RF signals
  - only the phase is adjusted to match signal field
  - performance close to that of MR receiver

Array Receivers: Coherent Detection SNR

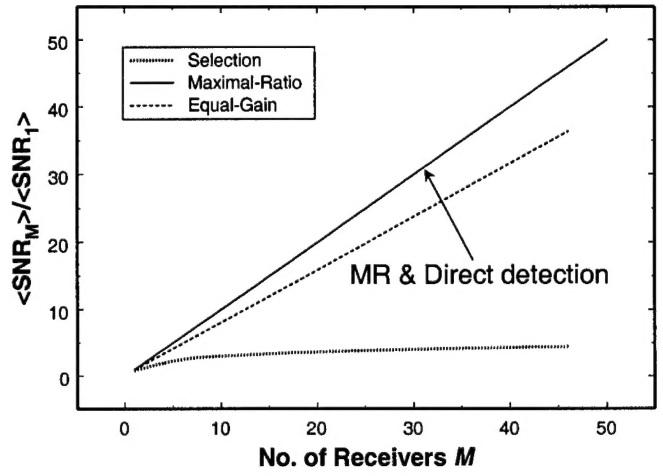

Florida Space Institute

Diagram of EG Coherent Array Receiver

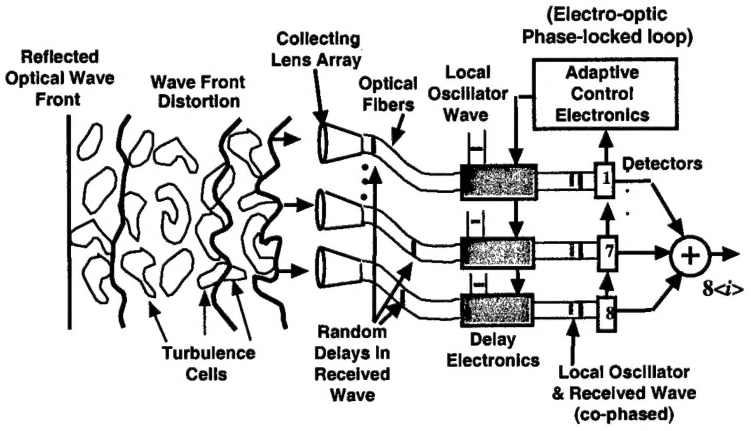

Florida Space Institute

EG Coherent Array Receiver

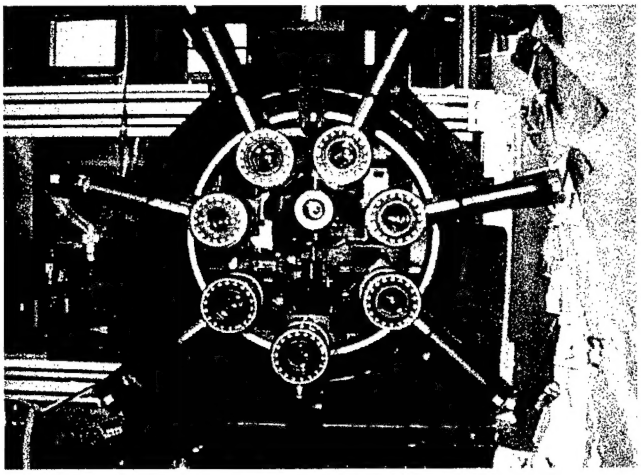

Florida Space Institute

ISTEF Site

(BMDO Innovative Science and Technology Experimentation Facility)

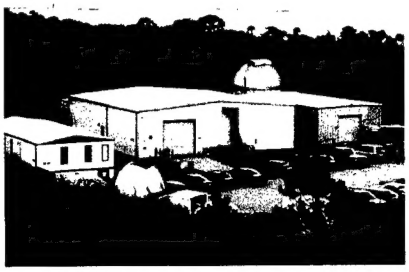

- **ISTEF brings together electro-optics, sensors, and lasers developed for experiments observing launches, etc. at KSC**
- **ISTEF site at sea level with 1 km and 12.5 km ranges**
- **ISTEF operated by Nichols Research**

ISTEF Experiment: EG Coherent Array